

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
17 June 2004 (17.06.2004)


PCT

(10) International Publication Number  
**WO 2004/049890 A1**

- (51) International Patent Classification<sup>7</sup>: **A47L 9/16**
- (21) International Application Number:  
PCT/GB2003/005193
- (22) International Filing Date: 2 December 2003 (02.12.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0228152.5 3 December 2002 (03.12.2002) GB
- (71) Applicant (for all designated States except US):  
**TECHTRONIC INDUSTRIES COMPANY LIMITED** [CN/CN]; 24/F CDW Building, 388 Castle Peak Road, Tsuen Wan, N.T., Hong Kong (CN).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **IVARSSON, Bengt, Ivar, Anders** [GB/GB]; 27 Park Road, Bearwood, Smethwick, Birmingham B67 5HP (GB).
- (74) Agent: **FORRESTER KETLEY & CO**; Chamberlain House, Paradise Place, Birmingham B3 3HP (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: **CYCLONIC SEPARATORS FOR SUCTION CLEANERS**

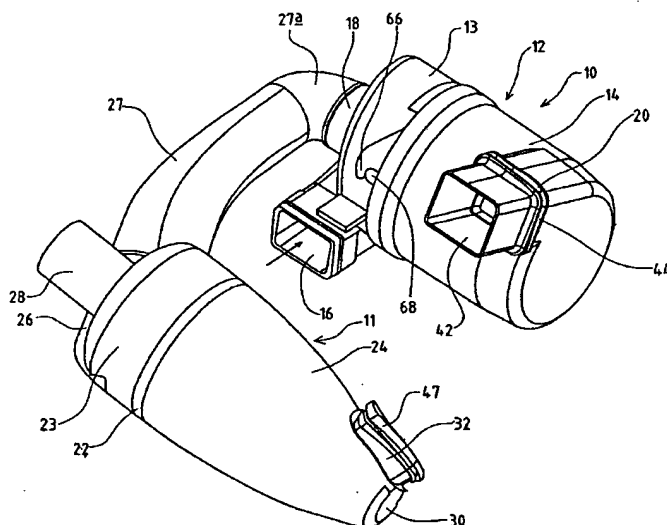

(57) Abstract: A dust separating apparatus for a suction cleaner comprises a cyclonic separating device (10) having a body (12) with an inlet and an outlet for a stream of air and an outlet for separated dust to enter a receptacle (34) for the dust, the body having a part (14) movable in relation to the rest (13) of the body while the rest of the body remains in position in the cleaner, to give access to the interior of the body for cleaning. There may be two separating devices (10, 11) arranged in succession, both having removable body parts (14, 24).

BEST AVAILABLE COPY

WO 2004/049890 A1

WO 2004/049890 A1



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

Title: Cyclonic Separators for Suction Cleaners

5    Description of Invention

        This invention relates to cyclonic separators for suction cleaners.

        Suction cleaners ("vacuum cleaners") are very well known products, in which dust (which expression as used herein includes other debris and embraces a range of particle sizes from microns to millimetres or even  
10   centimetres) is picked up by suction and entrained in an airflow, the dust particles subsequently being separated from the airflow in at least one cyclonic separator. The dust laden air is caused to pass through the separator(s), in which it flows at high speed in a circular path so that the dust particles are dumped out of the airflow by centrifugal force. The separator may include a  
15   filter or filters which remove all or very nearly all of any remaining entrained dust particles from the airflow, which will usually be particles of very small size.

        In most suction cleaners using a cyclonic separator, the separated dust is retained in the vicinity of the separator, within a body of the separator at the  
20   bottom thereof having regard to its normal orientation in use. Disposal of this dust entails removal of all or part of the separator body from the cleaner, so that the dust can be emptied. Inherently this removal and the emptying procedure gives good access to the interior of the separator body which enables it to be cleaned if required. Cleaning of the inside of the separator body might be  
25   required if dust which is picked up by the cleaner is of a nature such that it sticks to any surface with which it makes contact and thus coats the inside of the separator body which eventually would detract from the effectiveness of operation of the separator: for example the picking up of damp dust such as plaster dust might have this effect. It also facilitates access to any filter,

whether coarse or fine, within the separator body for any necessary cleaning or replacement of the filter.

It has been proposed that instead of collecting dust within the body of a separator the dust might be collected in a removable dust receptacle while the separator remains in position in the body of the cleaner. In this case the dust needs to pass from the separator by way of an outlet in the form of an aperture or opening in an appropriate position on a body of the separator, to enter the dust receptacle. Such an outlet by which dust leaves the separator body to enter the dust receptacle is unlikely to be sufficiently large to enable easy access to be gained by way of it for cleaning the separator body interior. It is also a possibility that if a large piece of debris is sucked up by the cleaner (assuming it is able to travel along the airflow passageways leading to the separator), it might not be able to pass through the outlet from the separator to the dust receptacle and thus be trapped in the separator body. Removal of such a piece of debris would be inconvenient and time consuming.

Accordingly it is an object of the present invention to overcome or reduce this disadvantage.

According to one aspect of the invention, we provide a dust separating apparatus for a suction cleaner, comprising a cyclonic separating device having a body with an inlet and an outlet for a stream of air and an outlet for dust separated from the airstream to enter a receptacle for the separated dust, wherein said body comprises a part movable in relation to the rest of the body while the rest of the body remains in position in the cleaner, to provide access to the interior thereof.

The movable part of the body may be completely removable therefrom, so that when the separating apparatus is installed in a suction cleaner the part can be removed from the cleaner leaving the rest of the body in position therein.

The separating device may have the inlet and outlet for the stream of air at one end of the body and the outlet for dust at the other end of the body, the

removable part being that having the outlet for dust therein. The body may be of circular cross-sectional shape for the flow of the stream of air therein in a vortex between the air inlet and outlet, and may be of more or less constant cross-section or may taper, e.g. conically. With a tangential air inlet and a  
5 central air outlet at or towards one end of the body, the dust outlet may extend generally tangentially at or towards the other end of the body.

The separating apparatus may comprise first and second cyclonic separating devices each comprising a body with an inlet and an outlet for the stream of air and an outlet for separated dust. The two separating devices may  
10 be arranged successively with the air outlet of the first communicating with the air inlet of the second so that dust is separated from the airstream in two stages, the first separating device removing large dust particles from the stream of air and the second separating device removing any remaining particles after the first separating device, and also finer particles. At least the first separating  
15 device may have a movable body part as aforesaid and preferably both the separating devices are so provided.

The removable body part of the or each separating device may engage with the rest of the body thereof by a bayonet fitting, i.e. one requiring the removable part to be presented to the rest of the body in the direction of the  
20 longitudinal axis of the separator after which an angular movement thereof about the axis causes the engagement of at least one retaining formation to hold the parts together. Suitable sealing means such as a deformable gasket may be provided between the body parts to prevent air leakage at the connection therebetween.

25 According to another aspect of the invention, we provide a suction cleaner provided with a dust separating apparatus according to the first aspect of the invention as set forth in one or more of the preceding paragraphs.

The two separating devices may lie in a body or casing of the suction cleaner spaced from, e.g. in generally parallel disposition to, one another with a

receptacle for separated dust having at least a part lying generally between them, the receptacle having respective inlets for separated dust communicating with the openings forming the dust outlets of the two separating devices.

The invention will now be described by way of example with reference  
5 to the accompanying drawings, of which:

Figure 1 is a diagrammatic perspective view showing an embodiment of dust separating apparatus in accordance with the invention;

Figure 2 is a perspective view as Figure 1 showing the apparatus with a dust receptacle therebetween;

10 Figure 3 is a view as Figure 2 but from a different perspective viewpoint, illustrating the manner of removal of the dust receptacle;

Figure 4 is a perspective view of one of the separating devices, showing removal of a part of the body thereof;

Figure 5 is a section through the separating device of Figure 4;

15 Figure 6 is a perspective view of the interior of one part of the separating device;

Figure 7 is a perspective view showing removal of a part of the other separating device;

Figure 8 is a perspective view of a suction cleaner and the separating  
20 apparatus therein.

Referring firstly to Figures 1 to 3 of the drawings, these show a dust separating apparatus in accordance with the invention, for use in a suction cleaner. Figures 2 and 3 show, in association with the separating apparatus, a receptacle for dust and other debris separated from the stream of air established  
25 by the cleaner when operating.

The separating apparatus comprises a first cyclonic separator indicated generally at 10 and a second cyclonic separator indicated generally at 11. Each of the separators is a cyclonic separating device, in which air flows in a stream from an air inlet to an air outlet and is caused to flow in a helical vortex within

the separator, which causes entrained dust particles to be separated from the airstream by centrifugal force. Cyclonic separators in suction cleaners are well known. The axis about which such flow in a vortex takes place is called herein the axis of the separator, and terms such as axially, tangentially and so on make  
5 reference to such axis.

The first separator 10 comprises a body 12 with a first body part 13 and a second body part 14. The body 12 is generally cylindrical, of circular cross-sectional shape and more or less constant cross-sectional area along its length. The body part 13 has a tangentially oriented air inlet 16 for a stream of air with  
10 dust entrained therein. This will have been picked up at a cleaning head of the cleaner, connected thereto, e.g. by a flexible hose and rigid wand. The nature of the connection to the cleaning head is irrelevant to the present invention. The body part 13 further has a centrally disposed axially extending outlet 18 for the stream of air. The body part 14 has, at its end remote from the body part 13,  
15 a tangentially oriented lateral outlet opening 20 for dust separated from the stream of air by centrifugal force in the course of its flowing in a vortex between the inlet 16 and outlet 18 of the separator 10.

The second separator 11 is disposed with its axis generally parallel to the axis of separator 10, and comprises a body 22 with a first body part 23 and  
20 second body part 24. The body part 23 has a tangentially and slightly helically inclined inlet 26 for the stream of air which it receives from the outlet 18 of the first separator 10 by way of a connecting elbow 27a and duct 27. An outlet for the airstream extends axially through the centre of the body part 23 and is indicated at 28. This is arranged to be connected by suitable ducting to a  
25 suitable motor-driven fan in a suction cleaner, with a filter arranged in such connection to trap any dust particles not separated from the airstream by the separators 10, 11. The body part 24 of the separator 11 is of tapering configuration so that its end 30 remote from the body part 23 is of much smaller diameter than the latter. Adjacent its end 30 there is a lateral outlet opening 32

for dust separated from the airstream by centrifugal force within the body 22 of the separator 11.

When installed in a suction cleaner a dust receptacle 34 is disposed generally in the region between the two separators 10, 11 for receiving dust separated from the airstream by the two separators. Figure 2 shows that the dust receptacle 34 comprises a base 35, side walls 36, 37 and end walls 38, 39 defining an interior space for receiving dust from the separators and retaining it for disposal. Wall 36 has an inset part 40 (in which the separator 10 is partially accommodated) and in this inset part there is an inlet 42 for dust separated in the first separator 10 and discharged at the outlet opening 20 thereof, the inlet 42 to the dust receptacle including a short tube 42 reaching into the interior volume of the receptacle 34: this helps ensure that the dust is retained in the receptacle. The inlet tube 42 is shown in Figure 1 in its operative disposition registering with the outlet opening 20 of the separator 10: also visible is a flexible seal, e.g. of bellows type, 44 preventing leakage of air and dust between the separator 10 and dust receptacle 34 when the dust receptacle is in position.

On the opposite side of the receptacle 34 a partition wall 46 defines an internal compartment within the receptacle which is separated from the main internal volume thereof. This secondary compartment has an inlet opening which registers with the outlet 32 from the second separator 11 so that the secondary compartment can receive dust separated from the airstream by the second separator. A flexible seal operative between the separator 11 and the dust receptacle is shown in Figure 1 at 47, around the end of the dust outlet 32 of the separator 11 and abutting the dust receptacle when the latter is in position, to prevent leakage of dust and air between the separator 11 and dust receptacle.

Figure 3 is a perspective view from the opposite direction to that of Figures 1 and 2, showing the dust receptacle in position and also showing a



cover 48 for the dust receptacle closing the top thereof which is shown open in Figure 2. The cover 48 is intended, in a suction cleaner, to form part of the visible exterior casing of the suction cleaner, and hence is styled for compatibility with the rest of the suction cleaner casing. For disposal of dust  
5 collected in the dust receptacle, the receptacle as a whole is lifted away from the separators in the direction indicated by arrow 50 so that it can be taken to a suitable place for emptying and disposal. For such emptying, the end wall 39 of the receptacle may open pivotally from its normal position in which it is held by a latching device.

10 Also visible in Figure 3 is a latching formation 52 on the end wall 39 of the dust receptacle, which forms part of the mechanism for retaining the dust receptacle in position in the cleaner.

Referring now to Figures 4, 5 and 6, these show the separator 10 in greater detail. Figures 5 and 6 show the interior of the body part 13 with the  
15 tangentially extending inlet 16 for dust-laden air, and, in the centre of the body part, the outlet duct 18 of which a portion 56 extends into the body part along the central axis of the separator. The part 56 is provided at its free end within the separator with a domed wire gauze element 58 which acts as an extremely coarse filter to ensure that large pieces of debris remain within the separator 10  
20 and do not pass to the second separator 11 by way of the connecting elbow 27a and duct 27. Also clearly shown in Figures 4 and 5 is the body part 14 of the separator 10 with its tangential outlet opening 20.

The body part 13 has at its free end an annular spigot 60 which fits closely within a complementary sleeve 62 at the facing end of the body part 14.  
25 A flexible seal 64 in the form of an O-ring is accommodated in an annular recess at the base of the sleeve 62, to provide an airtight seal between the body parts 13, 14. The body part 14 is provided with two hook-like latching formations 66 which are diametrically opposite one another relative to the body part, and these are engageable with lugs 68 similarly disposed on the body part

13. Thus a "bayonet connection" is afforded between the two body parts: the body part 14 is removable from the body part 13 by firstly an angular movement of the former to disengage the formations 66, 68 followed by axial movement of the body part 14 until it is clear of the body part 13. This facilitates access to the interior of the separator for cleaning or removal of any large items of debris which, having been picked up by the vacuum cleaner, are trapped in the separator 10 being unable to leave it by way of the dust outlet 20 or the airstream outlet 18. Refitting of the body part 14 to the part 13 is of course the reverse of the removal procedure.

10        Figure 7 shows the second separator 11 with its body part 24 removed from its body part 23. This enables the air outlet duct 28 in the interior of the body part 23 to be seen: it extends within the body of the separator to approximately the end of the body part 23. The body parts 23, 24 may fit together by a bayonet connection as described above in relation to the body parts 13, 14 of the first separator, or there may simply be frictional engagement between a spigot 23a at the free end of the body part 23 and a sleeve portion 24a at the facing end of the body part 24. A suitable seal is provided between the body parts 23, 24. It is envisaged that removal of the body part 24 of the second separator 11 is less likely to be required than is removal of the body part 14 of the first separator 10, since no large items of debris sufficient to interfere with the operation of the separator 11 should be able to reach the latter from the first separator. However, cleaning of the interior of the separator 11 may be required if damp plaster dust for example has been picked up by the suction cleaner.

25        Finally, Figure 8 of the drawings shows diagrammatically a suction cleaner having the above described separator and dust receptacle arrangement incorporated therein. It is a cleaner of the "cylinder" type, in which a flexible hose and optionally a rigid wand are used to connect a cleaning head to the cleaner, the cleaning head being able to be moved over a surface being cleaned

to pick up dust. The cleaner comprises a body with an external casing 70, having at one end a pair of wheels 72 on which, together with a further wheel or castor (not shown) underneath the casing 70 towards the opposite end thereof from the wheels 72, it can be moved over a floor surface. The cover 48  
5 of the dust receptacle is shown and it will be noted that the configuration thereof forms part of the styling of the cleaner. Also shown in Figure 8 is a handle 74 by which the dust receptacle may be carried when it has been removed from the cleaner for disposal of dust collected therein. Separator 10 is visible in Figure 8, and it will be appreciated that the separator 11 is  
10 correspondingly positioned at the opposite side of the dust receptacle. An electric motor, fan for causing the required airstream in the cleaner, and such further filters as may be required are provided in the part of the casing generally between the wheels 72. Also there is a cable storage reel from which an electrical power cable having a plug 76 at its free end may be deployed for  
15 connection to a mains socket outlet, and to which the cable may be retracted after use.

Although in the above described embodiment the separators 10, 11 have their axes oriented generally parallel to one another, they may alternatively be in some other orientation. For example their axes may be generally  
20 perpendicular to one another and in this case the airstream outlet of the first separator may lead directly tangentially into the inlet of the second separator, tangentially thereof. A dust receptacle, with respective inlets oriented to register with the outlets of the separators, may then lie generally in a space partly bounded by the two separators.

25 Although the suction cleaner described above is of the cylinder type, it is to be understood that the present invention is not limited to use in such a cleaner: it is also applicable to cleaners of the "upright" type.

In the present specification "comprises" means "includes or consists of" and "comprising" means "including or consisting of".


The features disclosed in the foregoing description, or the following claims, or the accompanying drawings, expressed in their specific forms or in terms of a means for performing the disclosed function, or a method or process for attaining the disclosed result, as appropriate, may, separately, or in any  
5 combination of such features, be utilised for realising the invention in diverse forms thereof.

## CLAIMS

1. A dust separating apparatus for a suction cleaner, comprising a cyclonic separating device (10, 11) having a body (12, 22) with an inlet (16, 26) and an outlet (18, 28) for a stream of air, and an outlet (20, 32) for dust separated from the airstream to enter a receptacle (34) for the separated dust, wherein said body (12, 22) comprises a part (14, 24) movable in relation to the rest of the body (12, 22) while the rest of the body (12, 22) remains in position in the cleaner, to provide access to the interior thereof.
2. Apparatus according to Claim 1 wherein the moveable part (14, 24) of the body (12, 22) is completely removable therefrom.
3. Apparatus according to Claim 2 wherein the separating device (10, 11) comprises the inlet (16, 26) and outlet (18, 28) for the stream of air at one end of the body (12, 22) and the outlet (20, 32) for dust at the other end of the body (12, 22), the removable part (14, 24) having the outlet (20, 32) for dust therein.
4. Apparatus according to Claim 3 wherein said separating device (10, 11) comprises a tangential air inlet (16, 26) and a central air outlet (18, 28) at or towards the one end of the body (12, 22), and the dust outlet (20, 32) extending tangentially at or towards the other end of the body (12, 22).
5. Apparatus according to any one of the preceding claims comprising first and second cyclonic separating devices (10, 11) each comprising a body (12, 22) with an inlet (16, 26) and an outlet (18, 28) for the stream of air and an outlet (20, 32) for separated dust, the air outlet (18) of the first separating device (10) being connected to the air inlet (26) of the second separating device (11).


6. Apparatus according to Claim 5 wherein at least the first separating device (10) has a said moveable body part (14).
- 5 7. Apparatus according to Claim 2 or any claim appendant thereto wherein the removable body part (14, 24) of the or each separating device (10, 11) engages with the rest of the body (12, 22) thereof by a bayonet fitting.
8. Apparatus according to any one of the preceding claims wherein sealing  
10 means (64) is provided between the body parts of the or each separating device (10, 11), for preventing air leakage at the connection therebetween.
9. A suction cleaner provided with dust separating apparatus according to any one of the preceding claims.
- 15 10. A suction cleaner according to Claim 9 wherein the separating apparatus is as claimed in Claim 5 and wherein said separating devices (10, 11) lie within a casing of the cleaner spaced from one another with a receptacle (34) for separated dust removably disposed with at least part thereof generally between  
20 them, the receptacle (34) having respective inlets (42) for dust communicating with the dust outlets (20, 32) of the two separating devices (10, 11).
11. A suction cleaner according to Claim 10 wherein said removable body parts (14, 24) of the separating devices (10, 11) are accessible for removal after  
25 removal of said receptacle (34) from the cleaner.
12. A dust separating apparatus, or suction cleaner incorporating same, substantially as hereinbefore described with reference to the accompanying drawings.


13. Any novel feature or novel combination of features described herein and/or in the accompanying drawings.

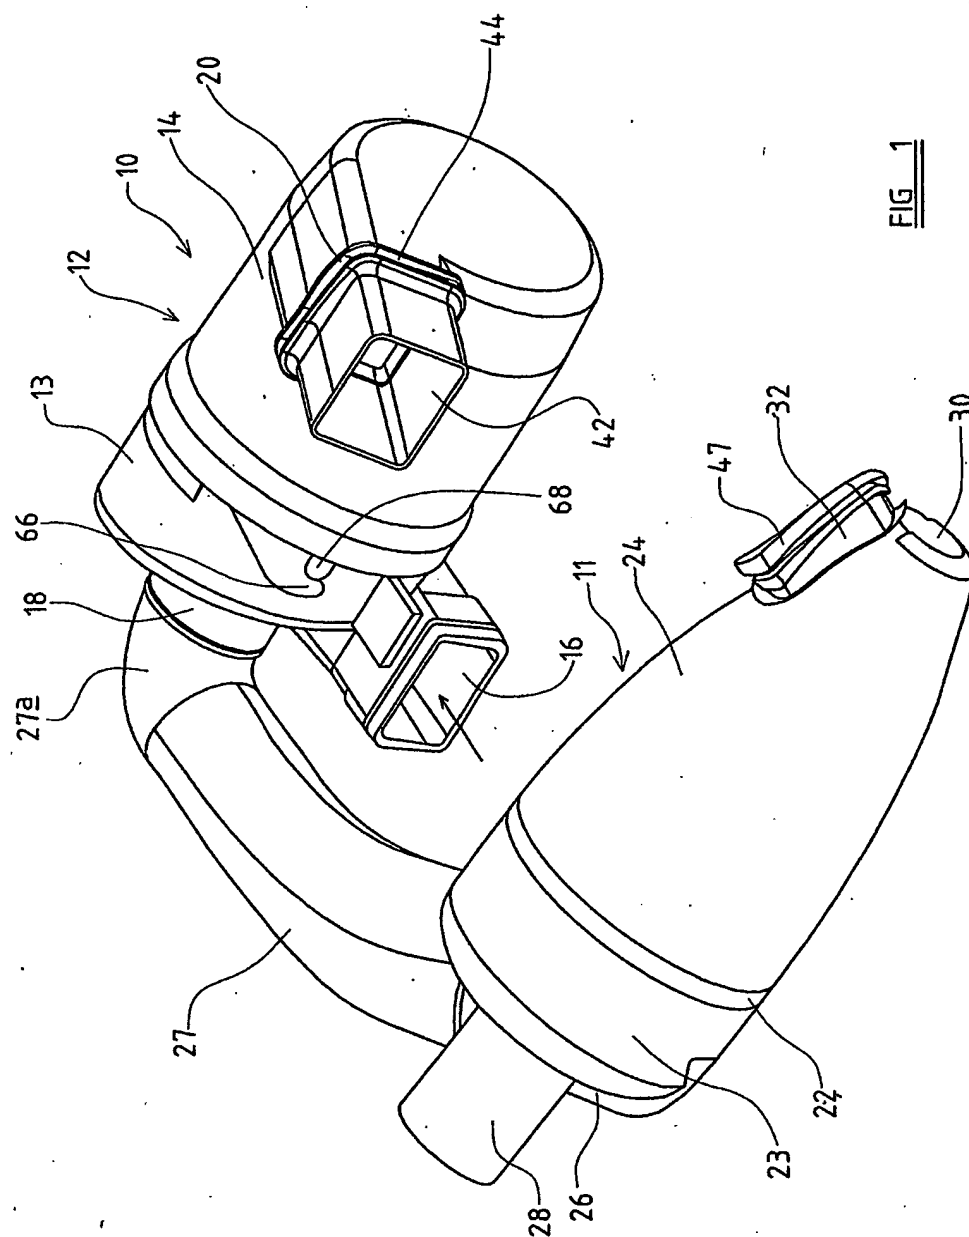



**FIG 1**




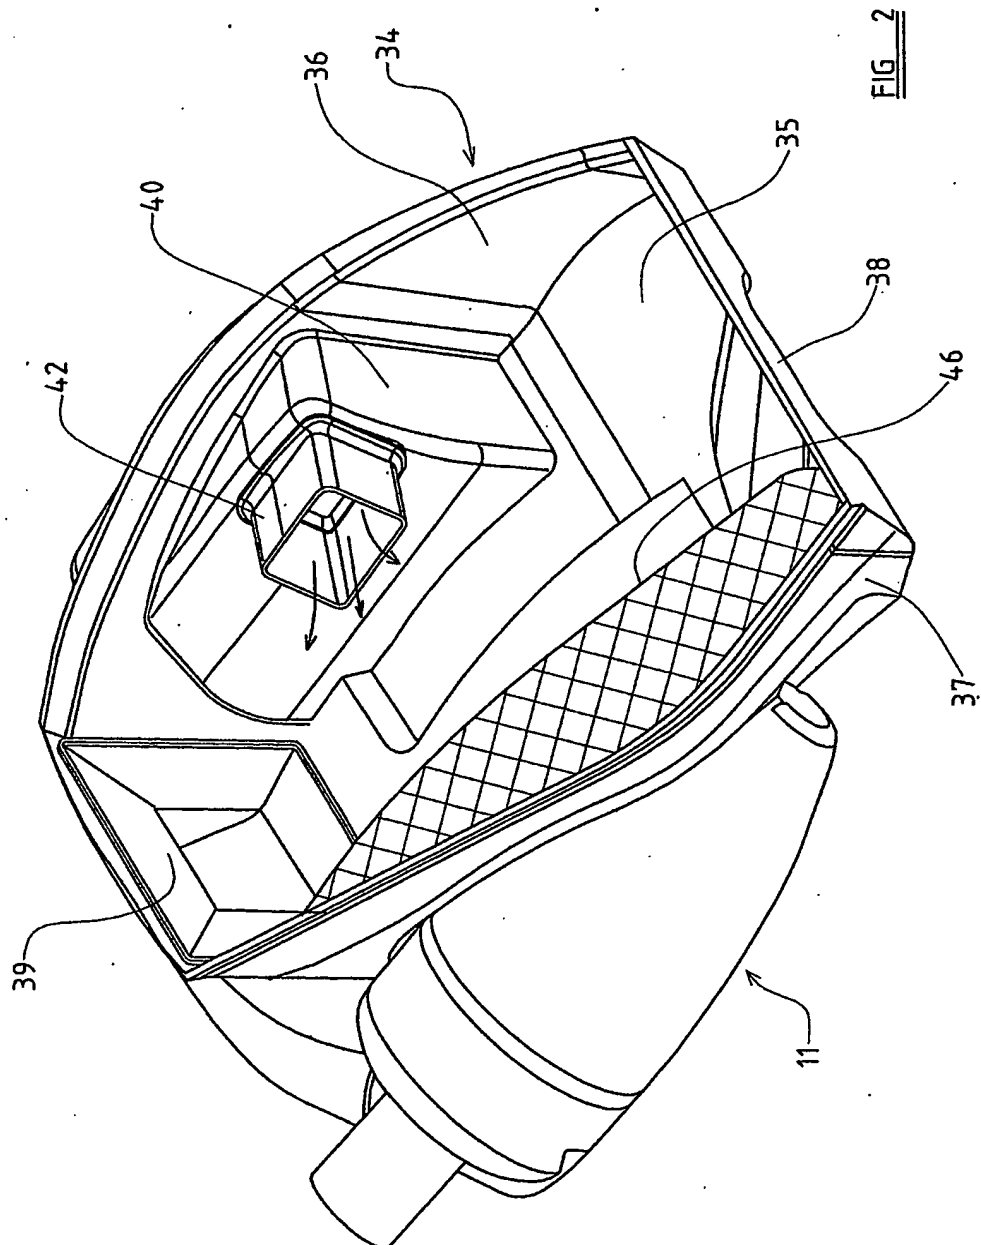

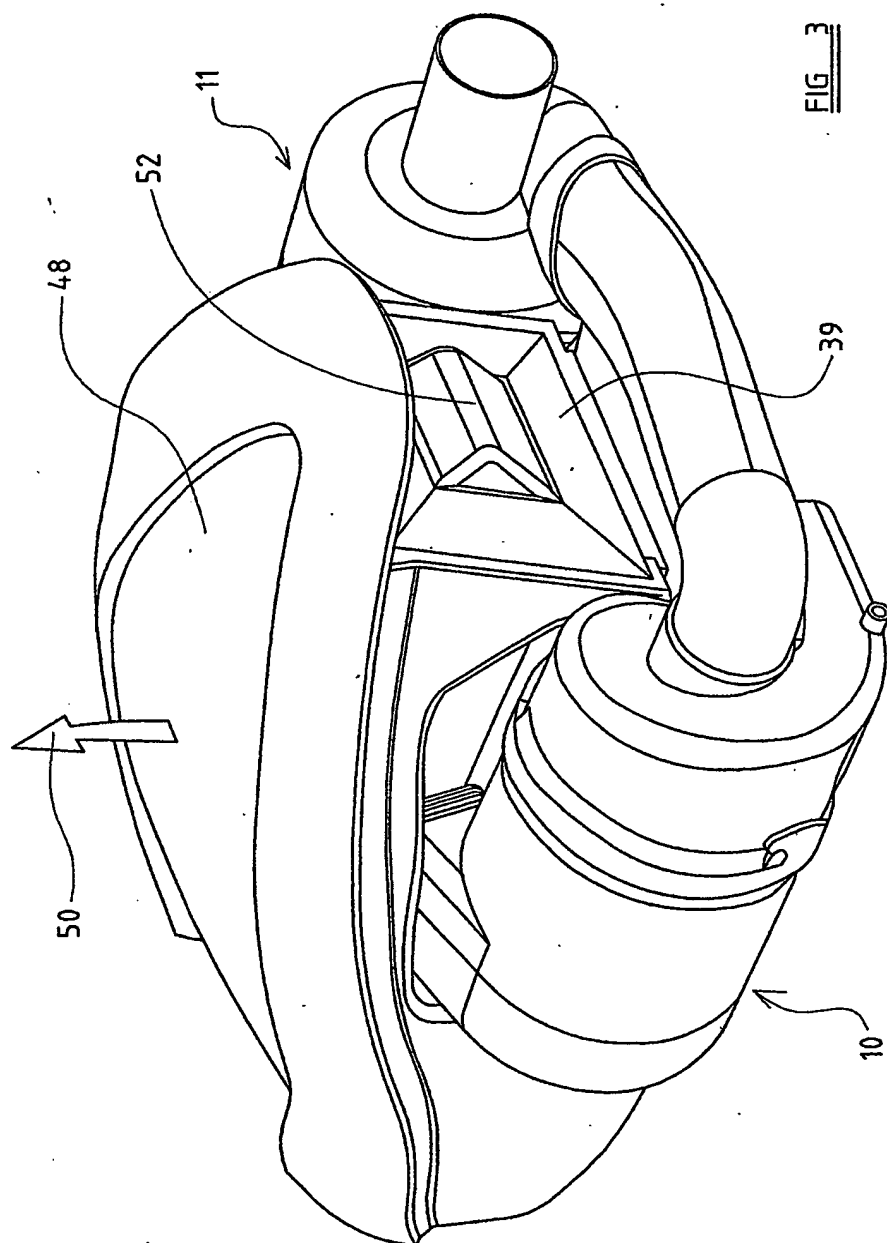

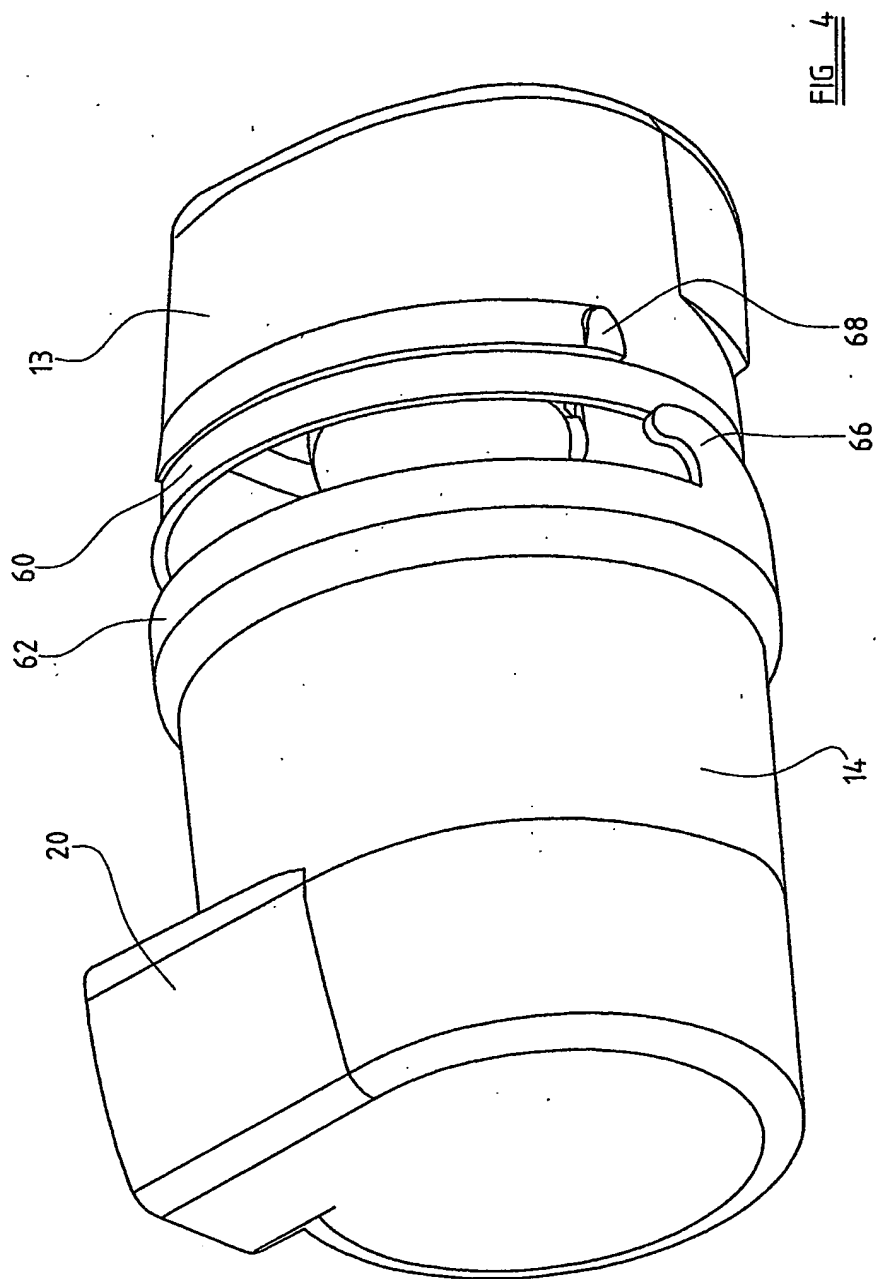

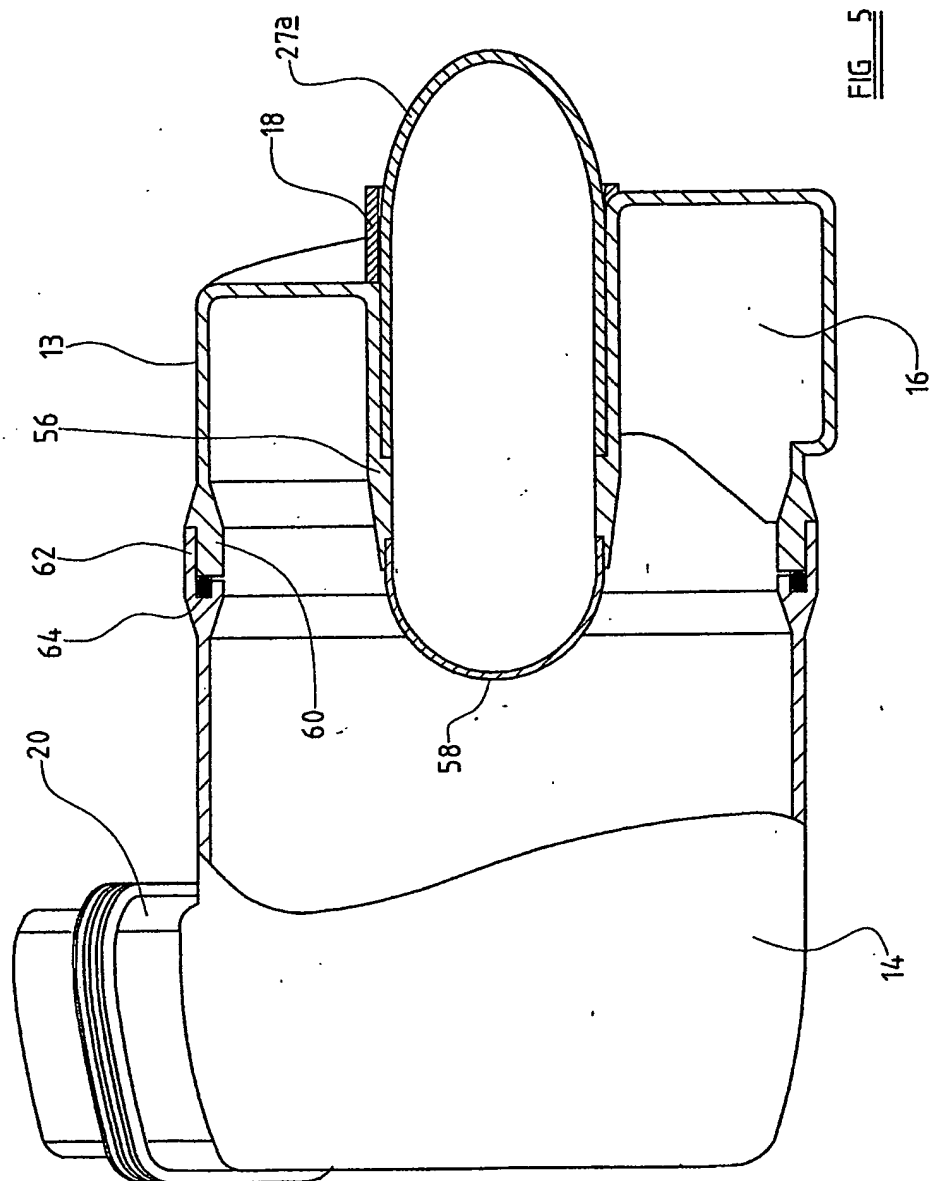

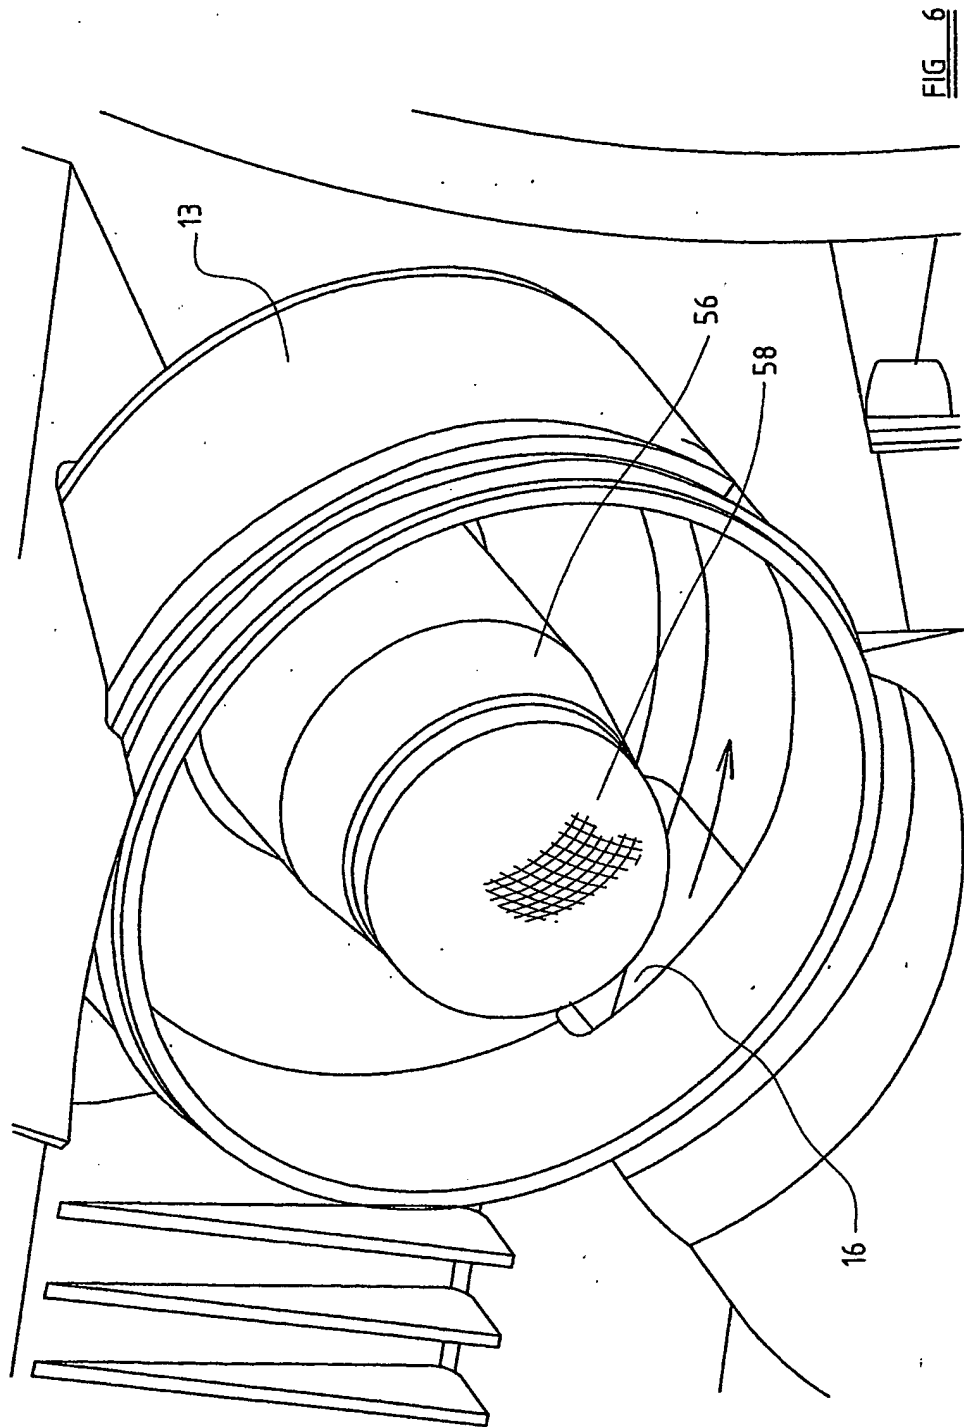

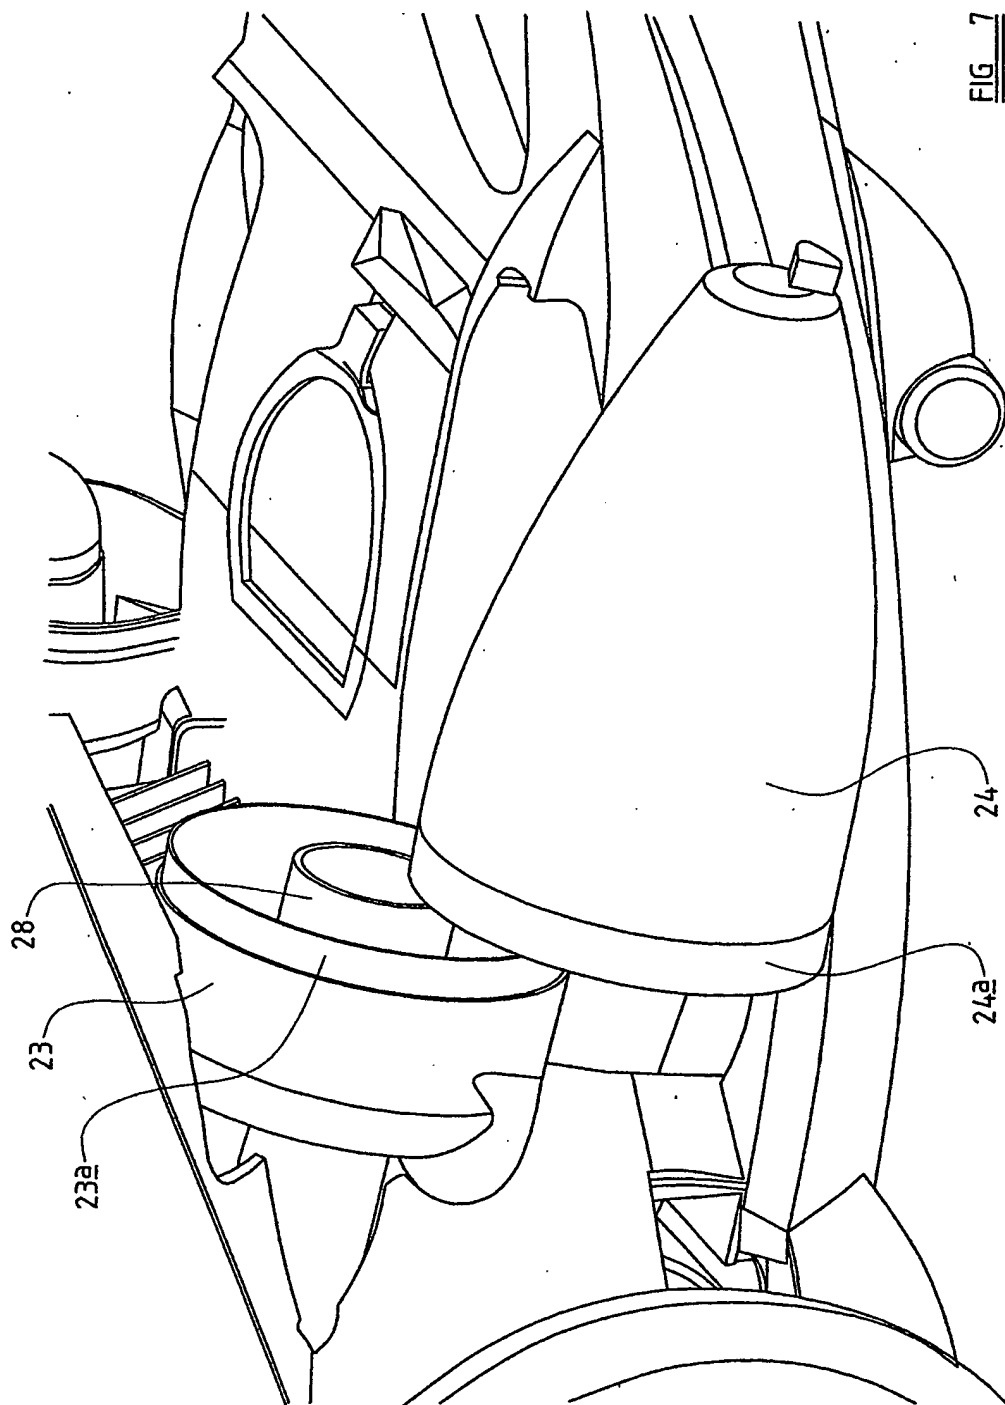


FIG 7

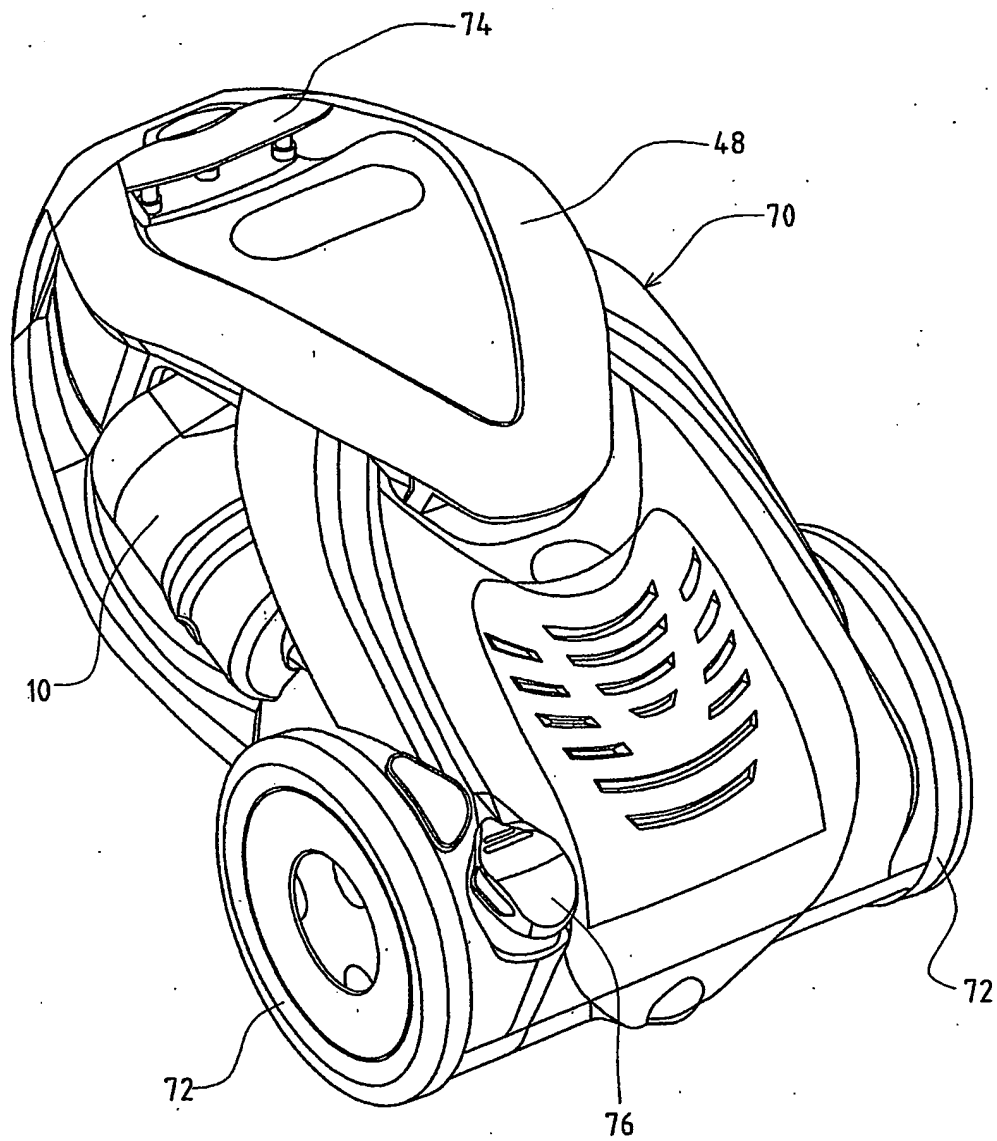


FIG 8

# INTERNATIONAL SEARCH REPORT

PCT/GB 03/05193

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC 7 A47L9/16		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) IPC 7 A47L		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the International search (name of data base and, where practical, search terms used) EPO-Internal, WPI Data, PAJ		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002/062632 A1 (OH JANG-KEUN) 30 May 2002 (2002-05-30) paragraph '0029! - paragraph '0043!; figures 2,3 ---	1-4, 6-9, 11-13
X	EP 0 489 468 A (PHILIPS NV) 10 June 1992 (1992-06-10) column 3, line 16 -column 4, line 31; figures ---	1, 2, 4-9, 12, 13
X	WO 98 35602 A (FRESHMAN AKTIEBOLAG ;ELECTROLUX ABP (SE); KRANTZ EVERT (SE)) 20 August 1998 (1998-08-20) page 2, line 27 -page 4, line 37; figure 2 --- -/--	1, 2, 4, 6-9, 11-13
<div style="display: flex; justify-content: space-between;"> <span><input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.</span> <span><input checked="" type="checkbox"/> Patent family members are listed in annex.</span> </div>		
<div style="display: flex;"> <div style="flex: 1;"> <p>* Special categories of cited documents :</p> <p>*A* document defining the general state of the art which is not considered to be of particular relevance</p> <p>*E* earlier document but published on or after the International filing date</p> <p>*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>*O* document referring to an oral disclosure, use, exhibition or other means</p> <p>*P* document published prior to the International filing date but later than the priority date claimed</p> </div> <div style="flex: 1;"> <p>*T* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>*G* document member of the same patent family</p> </div> </div>		
Date of the actual completion of the International search <div style="text-align: center; font-weight: bold;">23 March 2004</div>		Date of mailing of the International search report <div style="text-align: center; font-weight: bold;">06/04/2004</div>
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer <div style="text-align: center; font-weight: bold;">Lopez Vega, J</div>



# INTERNATIONAL SEARCH REPORT

Application No  
PCT/GB 03/05193

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002/011053 A1 (OH JANG-KEUN) 31 January 2002 (2002-01-31)  paragraph '0007! - paragraph '0022!; figures 2,3  ----	1,2,4, 6-9, 11-13
P,X	US 2003/106182 A1 (LEE YONG-HEE) 12 June 2003 (2003-06-12)  paragraph '0021! - paragraph '0038!; figures  -----	1,2,4, 6-9, 11-13

# INTERNATIONAL SEARCH REPORT

Application No  
PCT/GB 03/05193

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002062632 A1	30-05-2002	KR 2002041140 A	01-06-2002
		CN 1355004 A	26-06-2002
		DE 10142016 A1	06-06-2002
		EG 22890 A	30-10-2003
		FR 2817137 A1	31-05-2002
		GB 2369290 A ,B	29-05-2002
		JP 2002172076 A	18-06-2002
		NL 1018368 C2	27-08-2002
		NL 1018368 A1	29-05-2002
		RU 2195148 C1	27-12-2002
EP 0489468 A	10-06-1992	NL 9002668 A	01-07-1992
		EP 0489468 A1	10-06-1992
		JP 6052749 U	19-07-1994
		US 5135552 A	04-08-1992
WO 9835602 A	20-08-1998	SE 508524 C2	12-10-1998
		SE 9700500 A	14-08-1998
		WO 9835602 A1	20-08-1998
US 2002011053 A1	31-01-2002	KR 2002009768 A	02-02-2002
		CN 1334062 A ,B	06-02-2002
		DE 10058314 A1	14-02-2002
		EG 22425 A	29-01-2003
		FR 2812183 A1	01-02-2002
		GB 2364940 A ,B	13-02-2002
		JP 2002051951 A	19-02-2002
		NL 1017181 C2	29-01-2002
		RU 2181254 C1	20-04-2002
US 2003106182 A1	12-06-2003	KR 2003048626 A	25-06-2003
		AU 754365 B1	14-11-2002
		CA 2391221 A1	12-06-2003
		CN 1425352 A	25-06-2003
		DE 10222656 A1	26-06-2003
		FR 2833148 A1	13-06-2003
		GB 2384452 A ,B	30-07-2003
		JP 2003190061 A	08-07-2003
		NL 1020578 C2	25-07-2003
		NL 1020578 A1	13-06-2003

This Page is inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record

## BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images  
problems checked, please do not report the  
problems to the IFW Image Problem Mailbox**